

MF 9000-10 TL

Min conductor	0.1 mm	0.004"
Max conductor	5 mm	0.200"
Max over insulation	7 mm	0.275"
Max tube die diameter	10 mm	0.400"

Use

Insulation	Small solid and stranded wires
Domain of use	Medical tube Shock tubing
Compound	PVC / PE / PBT / PA


mf 9000

Characteristics

MF 9000-IO TL

MF	Fixed centering
TL	Triple Layers
Distribution mono-flow	Conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for quick and easy dismantling

Design

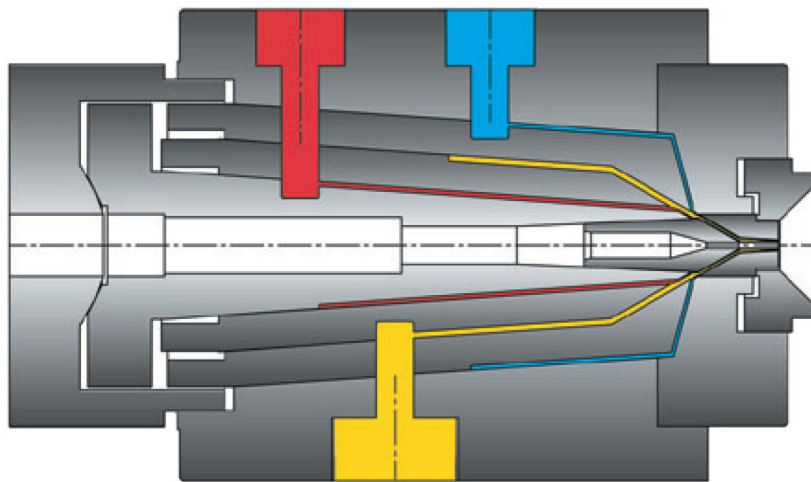

Options

Connections	Connecting flanges for any type of extruders
By Pass	Manual - Pneumatic - Hydraulic
Distributors	Special distribution cartridge for LSZH Mono distribution cartridge for single layer
Tooling	Hardened steel Semi-compression - Tube Design recommendation on request
Accessories	Assembly and disassembly cleaning kit Trolley with adjustable height
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning