

## MF 9000-50 SL H

Min conductor	2 mm	0.080"
Max conductor	24 mm	1.000"
Max over insulation	40 mm	1.600"
Max tube die diameter	50 mm	2.000"

## Use


Insulation	Small solid and stranded wires
Domain of use	Special chemical applications
	Fuel lines
	Data cables
	Plenum cables
	HTW - High Technology Wire
	Aeronautic applications
Compound	Fluoro polymers PTFE / FEP / PFA

## Characteristics

## MF 9000-50 SL H

MF	Fixed centering
SL	Single Layer
H	High temperature head assembly manufactured from special fluoro-resistant alloy
Distribution mono-flow	Conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

## Design

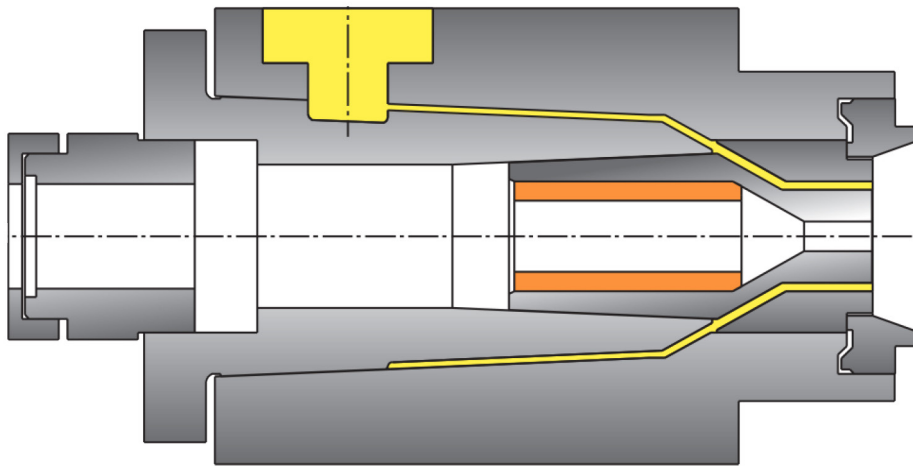

## Options

Connections	Fluoro-resistant connecting flanges for any type of extruder
Tooling	Fluoro-resistant alloy or Tungsten carbide Tube Design recommendation upon request
Accessories	Vacuum adapter Assembly and disassembly cleaning kit Trolley with adjustable height
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning

