

## MX 9000-150 SLS

Min conductor	10 mm	0.400"
Max conductor	135 mm	5.300"
Max over insulation	140 mm	5.500"
Max tube die diameter	155 mm	6.100"

## Use

Domain of use	Jacketing with any type of cable assembly up to 90 mm
Compound	PVC / PE / PA / LSZH ...

SWISS MADE


MX 9000

## Characteristics

## MX 9000-150 SLS

MX	Manual centering and fixed centering
SL	Single Layer
SLS	Single Layer +Skin or Stripe(s)
Distribution mono-flow	Conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for easy and quick dismantling
Gum Space	A bearing allows the axial adjustment of the wire guide from the back of the head, even under pressure

## Design

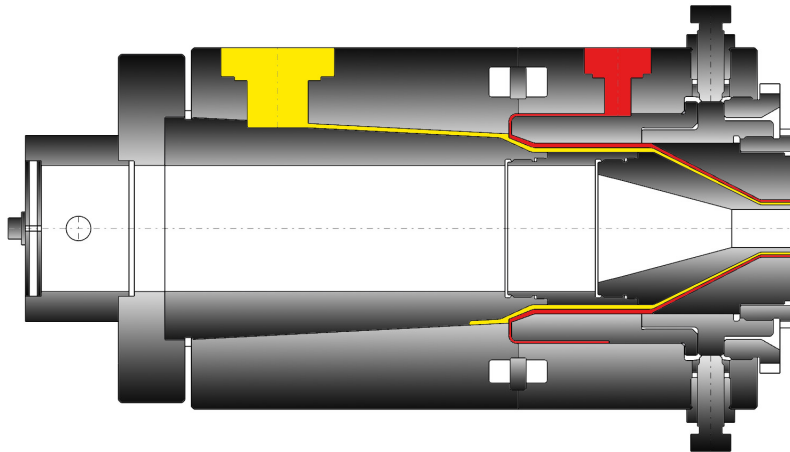

## Options

Connections	Connecting flanges for any type of extruders
By pass	Manual - Hydraulic
Distributors	Special distribution cartridges for LSZH, PA
Tooling	Hardened steel Semi-compression - Tube Special tooling Design recommendation on request
Accessories	Vacuum adapter Assembly and disassembly cleaning kit Trolley with adjustable height
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning

