

MX 9000

MX 9000-200 SLS

Min conductor	10 mm	0.400"
Max conductor	150 mm	5.900"
Max over insulation	160 mm	6.300"
Max tube die diameter	200 mm	8.000"

Use


Domain of use	Jacketing with any type of cable assembly up to 150 mm
Compound	PVC / PE / LSZH ...

Characteristics

MX 9000-200 SLS

MX	Manual centering
SL	Single Layer
SLS	Single Layer +Skin or Stripe(s)
Distribution mono-flow	Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for easy and quick dismantling
Gum Space	A bearing allows the axial adjustment of the wire guide from the back of the head, even under pressure

Design

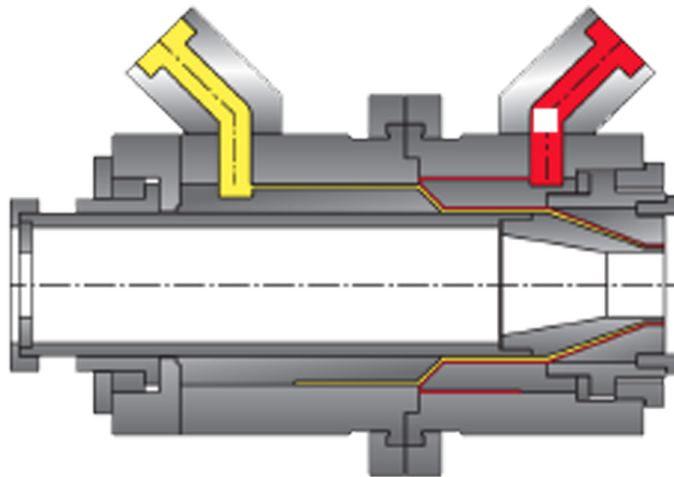

Options

Connections	Connecting flanges for any type of extruder
By pass	Manual - Pneumatic - Hydraulic
Distributors	Special distribution cartridges for LSZH, PA
Tooling	Hardened steel Semi-compression - Tube Design recommendation on request
Accessories	Assembly and disassembly cleaning kit Trolley with adjustable height
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning

