

mflex 9000-10 SFS+S 3ex

Min conductor	0.1 mm	0.004"
Max conductor	5 mm	0.200"
Max over insulation	10 mm	0.400"
Max tube die diameter	10 mm	0.400"

Use

Insulation	Small solid and stranded wires
Domain of use	Telephone wires
	Small CATV cables
	Minicoax
	LAN cat. 6-7-8
Compound	Chemical or physical foam, PE ...


mflex

Characteristics

Mflex 9000-10 SFS+S 3ex

Mflex	Fixed centering with fine tuning
SFS	Skin - Foam - Skin
S	only for one Stripe
Distribution mono-flow	3 conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow
Gum Space	Axial die adjustment

Design

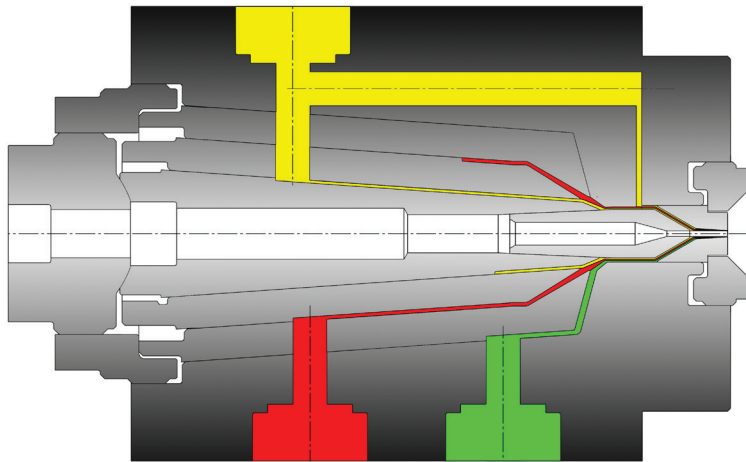

Options

Connections	Connecting flanges for any type of extruders
By pass	Manual - Pneumatic - Hydraulic
Distributor	Special distribution cartridges for any compound
Tooling	Diamond - Tungsten carbide Compression (high concentricity level tooling) Design recommendation on request
Mflex	Microflex system for 100% concentricity
Accessories	Assembly and disassembly cleaning kit
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning