



## mflex 9000-07 TL

Min conductor	0.2 mm	0.007"
Max conductor	4 mm	0.157"
Max over insulation	6 mm	0.236"
Max tube die diameter	10 mm	0.395"

### Use


Insulation	Small solid and stranded wires
Piping	Small pipes
Domain of use	Medical pipes, multilayer, multilumen Multilayer pipes Wire, tube with embedded stripe Double layer wire and pipe with single or multiple stripes Electronic wires Mini-coax Skin-foam-skin wires Profiled cables
Compound	PVC / PE / PA / LSZH / XLPE

## Characteristics

## Mflex 9000-07 TL

Mflex	fixed centering with fine tuning
TL	Triple Layer
Distribution	Conical distribution cartridge
mono-flow	Easy to clean-no holes or slots-no dead spots
	Constant and smooth compound flow
	No stress and no shear in the melted compound
Gum Space	Axial die adjustment

## Design

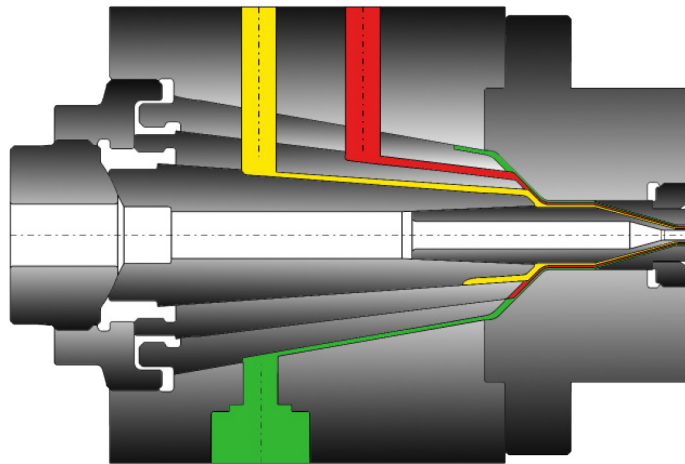

## Options

Connections	Connecting flanges for any type of extruder
By pass	Manual - Pneumatic - Hydraulic
Distributor	Special distribution cartridges for any compound
Tooling	Hardened steel - Tungsten carbide - Diamond
	Compression - Semi-compression - Tube
	Special tooling - Figure eight - Twin cable...
	Design recommendation upon request
Accessories	Assembly and disassembly cleaning kit
	Vacuum adapter
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours
	Technical assistance - Engineering - Commissioning