

Mflex 9000-10 SFS

Min conductor	0.1 mm	0.004"
Max conductor	5 mm	0.200"
Max over insulation	10 mm	0.400"
Max tube die diameter	10 mm	0.400"

Use

Insulation	Small solid and stranded wires
Domain of use	Telephone wires
	Small CATV cables
	Minicoax
	LAN cat. 6-7-8
Compound	Chemical or physical foam, PE ...

Mflex


Characteristics

Mflex 9000-IO SFS

Mflex	Fixed centering with fine tuning
SFS	Skin - Foam - Skin
Distribution mono-flow	3 Conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

mflex

Design

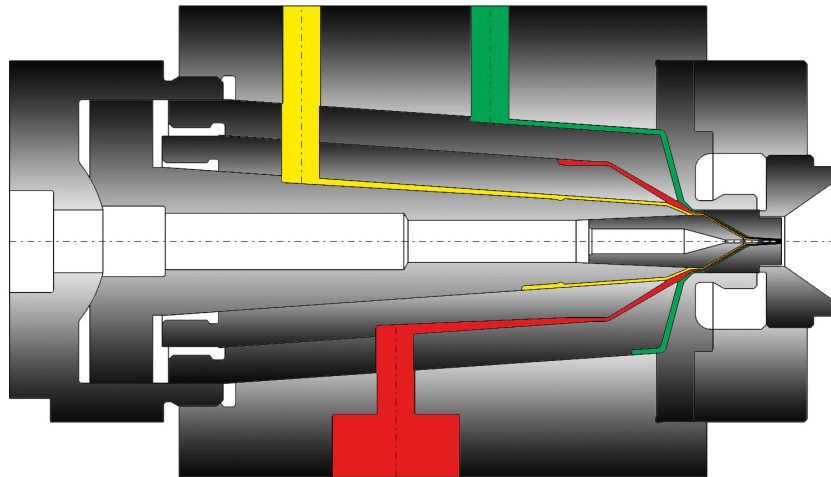

+

Options

Connections	Connecting flanges for any type of extruders
By pass	Manual - Pneumatic - Hydraulic
Distributor	Special distribution cartridges for any compound
Tooling	Diamond - Tungsten carbide Compression (high concentricity level tooling) Design recommendation on request
Mflex	Microflex system for 100% concentricity
Accessories	Assembly and disassembly cleaning kit
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning

+

+