

mflex 9000-45 SLS

Min conductor	2 mm	0.080"
Max conductor	35 mm	1.400"
Max over insulation	40 mm	1.600"
Max tube die diameter	45 mm	1.800"

Use

Domain of use	Jacketing with any type of cable assembly up to 35 mm CATV - Foam-Skin Fiber optic carrier tubes Coaxial RG cables
Compound	PVC / PE / PA / LSZH ...

mflex


SWISS MADE

Characteristics

Mflex 9000-45 SLS

Mflex	Microflex system for 100% concentricity
SL	Single Layer
SLS	Single Layer + Skin or Stripe(s)
Distribution mono-flow	Conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for quick and easy dismantling
Gum Space	A bearing allows the axial adjustment of the wire-guide from the rear of the crosshead even while under pressure

Design

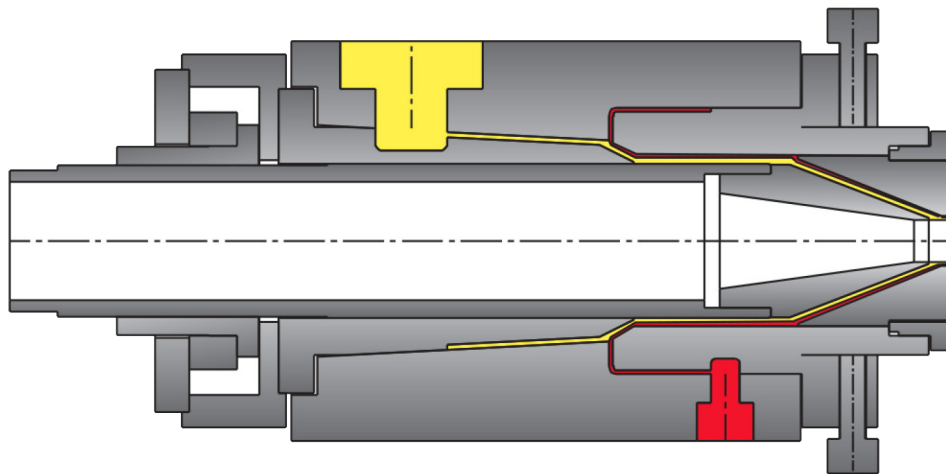

Options

Connections	Connecting flanges for any type of extruder
By pass	Manual - Pneumatic - Hydraulic
Distributor	Special distribution cartridges for LSZH Mono distribution cartridge for faom
Tooling	Hardened steel Semi-compression - Tube High concentricity level Design recommendation on request
Accessories	Vacuum adapter Assembly and disassembly cleaning kit Trolley with adjustable height
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning