



romex WC 2 SLS

Min conductor	5 mm	0.197"
Max conductor	65 mm	2.560"
Max over insulation	75 mm	2.952"
Max tube die diameter	80 mm	3.150"

Use

Domain of use	Jacketing of any type of cable up to 11 mm
Compound	PVC / PE / PA / LSZH / XLPE


romex

Characteristics

romex WC 2 SLS

	Manual centering
SL	Single Layer
SLS	Single Layer + Single or Stripe(s)
Distribution	Conical distribution cartridge
mono-flow	Easy to clean-no holes or slots-no dead spots
	Constant and smooth compound flow
	No stress and no shear in the melted compound
Heating	Heating collar

Design

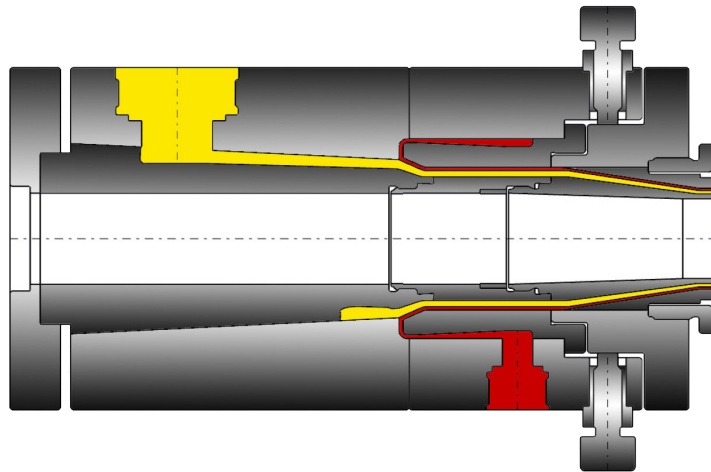

Options

Connections	Connecting flanges for any type of extruder
By pass	Manual - Pneumatic - Hydraulic
Distributor	Special distribution cartridges for any compound
Tooling	Hardened steel
	Semi-compression Tube
	Special tooling - Figure eight - Twin cable...
	Design recommendation upon request
Accessories	Assembly and disassembly cleaning kit
	Vacuum adapter
	Trolley with adjustable height
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours
	Technical assistance - Engineering - Commissioning