

MF 9000-10 SF-FS

Min conductor	0.1 mm	0.004"
Max conductor	5 mm	0.200"
Max over insulation	10 mm	0.400"
Max tube die diameter	10 mm	0.400"

Use

Insulation	Small solid and stranded wires
Domain of use	High technology wires HTW Minicoax CATV RG types Special wires with inner or outer skin
Compound	Chemical or physical foam, PE ...

mf 9000


Characteristics

MF 9000-IO SF-FS

MF	Fixed centering
SF / FS	Skin - Foam or Foam - Skin
Distribution	2 conical distribution cartridge
mono-flow	Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

MF 9000

Design

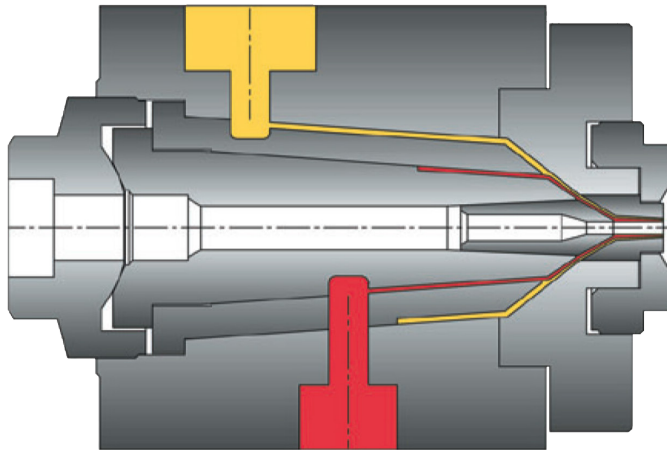

Options

Connections	Connecting flanges for any type of extruders
By pass	Manual - Pneumatic - Hydraulic
Tooling	Diamond -Tungsten carbide
	Compression
	Design recommendation per request
Mflex	Microflex system for 100% centricity
Accessories	Assembly and disassembly cleaning kit
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours
	Technical assistance - Engineering - Commissioning

