



Fluomex IO Mflex SL R

Min conductor	0.1 mm	0.004"
Max conductor	5 mm	0.200"
Max over insulation	7 mm	0.275"
Max tube die diameter	20 mm	0.790"

Use

Insulation	Small solid and stranded wires
Domain of use	Mini coax FEP Special chemical applications Fuel lines Data cables Plenum cables HTW - High Technology Wire
Compound	Fluoro polymers PTFE / FEP / PFA


mflex

Characteristics

Fluomex IO Mflex SL R

Mflex	Microflex system for 100% concentricity
SL	Single Layer
H	High temperature head assembly manufactured from special fluoro-resistant alloy
Distribution mono-flow	Conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

Design

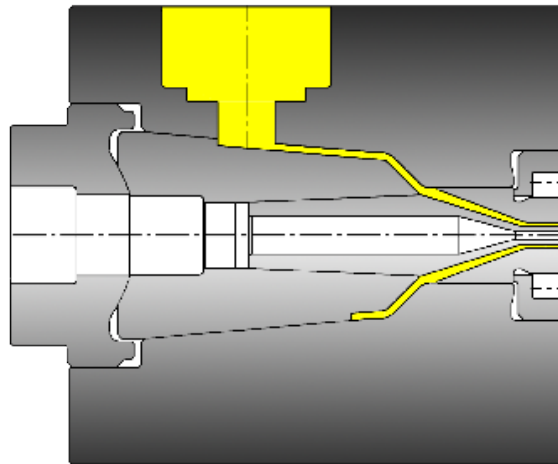

Options

Connections	Fluoro-resistant connecting flanges for any type of extruders
Tooling	Fluoro-resistant alloy or Tungsten carbide Tube Special tooling for physical foam FEP Design recommendation on request
Accessories	Assembly and disassembly cleaning kit
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning

