

avantis IO Mflex SL

Min conductor	0.1 mm	0.004"
Max conductor	5 mm	0.200"
Max over insulation	7 mm	0.275"
Max tube die diameter	10 mm	0.400"

Use

Insulation	Small solid and stranded wires
Domain of use	LAN cat 5-6-7 Special wires Optical fibers - loose or tight Mono fiber - Multi fibers
Compound	PVC / PE / PBT / PA / LSZH...

mflex


Characteristics

avantis IO Mflex SL

Mflex	Microflex system for 100% concentricity
SL	Single Layer
Distribution mono-flow	Conical distribution cartridge Easy to clean-no holes or slots-no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

mflex

Design

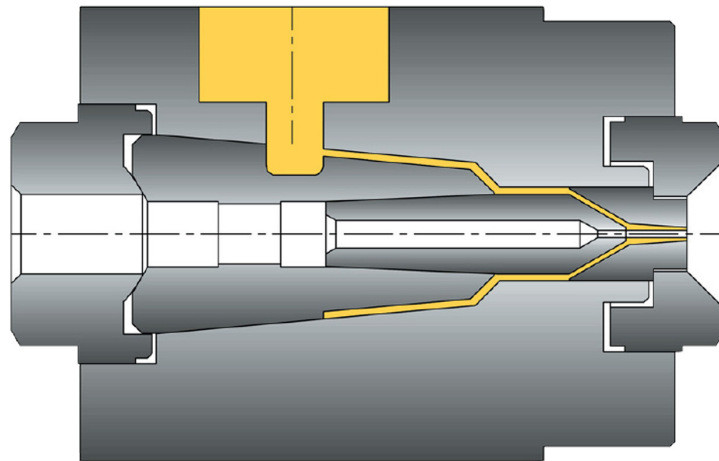

Options

Connections	Connecting flanges for any type of extruders
By pass	Manual - Pneumatic
Distributor	Special distribution cartridges for LSZH, PA...
Tooling	Diamond- Tungsten carbide Compression - Semi-compression - Tube High concentricity level Design recommendation on request
Jelly injection system	Changeable entry and exit micro-tubes Special support with X and Y axis adjustment of exit micro-tube, to guarantee accurate and constant fiber centering
Accessories	Vacuum adapter
Spare parts	Permanent stock, shipment within 24 hours
Services	Microdia answers your request within 24 hours Technical assistance - Engineering - Commissioning

